




Flexiva aluminum air



- Outer surface is made of aluminum foil, inner surface is made of Metallized Opp and high tensile steel wire for heating ventilation and gas transition systems.
- Opp allows smooth inner surface and as a result it decreases pressure loss and provides hygienic environment which bacterias can not growth.
- Suitable for low and medium pressure atmosphere.
- Ability to press and twist.
- Air tight, resistant to tear and wear.
- Flame retardant.
- No cause of poisonous gas in case of fire.

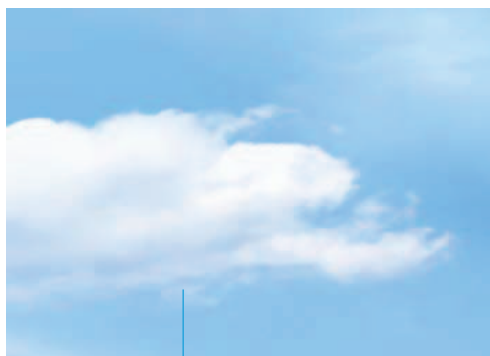

Technical Specifications :

Material	: Aluminum + Opp
Diameter Range	: Ø 52 mm – Ø 1000 mm
Temperature Range	: -30 °C / + 80 °C
Air Velocity	: Max. 30 m/sec.
Operating Pressure	: Max. 5000 Pa.
Class	: Flame retardant
Standard offer type	: Package / 10 m.

Insulated Air

Insulation	: 25 mm – 100 mm thickness and 12-16 kg / m ³ density glasswool
Jacket	: Aluminum

SONO AIR

Made of micro perforated laminated aluminum foil + Opp which provides sound insulation and high tensile steel wire for heating ventilation and gas transition systems.

Technical Specifications :

Insulation	: 25 mm – 100 mm thickness and 12-16 kg / m ³ density glasswool
Jacket	: Aluminum
Barrier	: PET