




Flexiva **pvc**
combi



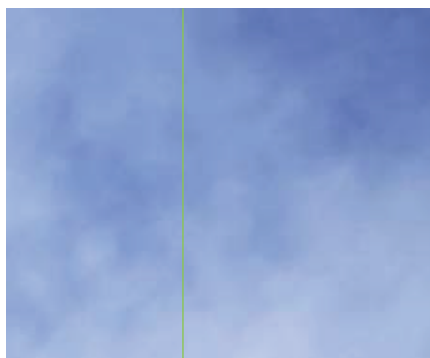

- Made of aluminum covered with PVC on outer surface and high tensile steel wire for heating ventilation and gas transition systems.
- Suitable for low and medium pressure atmosphere.
- Ability to press and twist.
- Air tight, resistant to tear and wear.
- Flame retardant.
- No cause of poisonous gas in case of fire.

Technical Specifications :

Material	: Aluminum + PVC
Diameter Range	: Ø 52 mm – Ø 1000 mm
Temperature Range	: -30 °C / + 120 °C
Air Velocity	: Max. 30 m/sec.
Operating Pressure	: Max. 5000 Pa.
Standard offer type	: Package / 10 m.