




Flexiva aluminum sky



- Made of laminated aluminum foil both inner-outer surface and high tensile steel wire for heating ventilation and gas transition systems.
- Suitable for low and medium pressure atmosphere.
- Ability to press and twist.
- Air tight , resistant to tear and wear .
- Flame retardant.
- No cause of poisonous gas in case of fire.

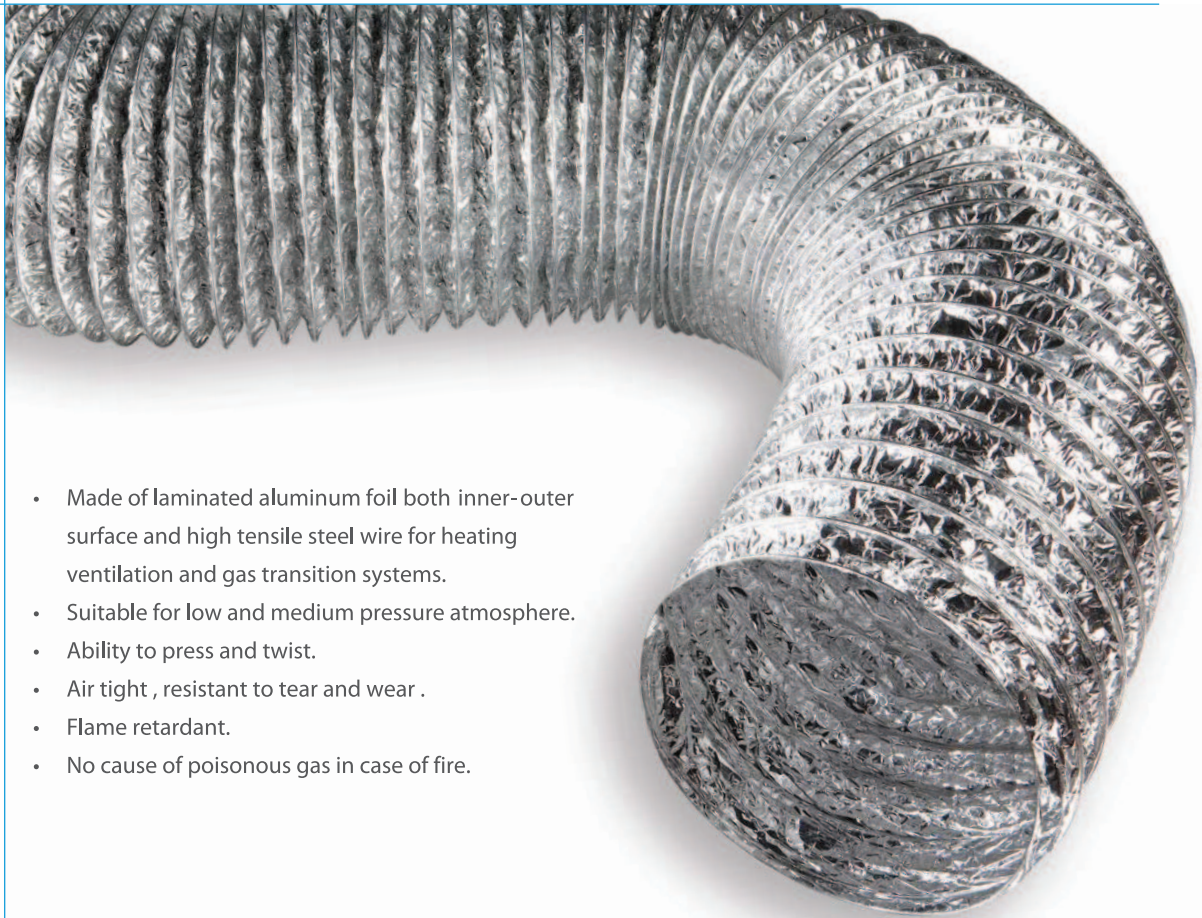

Technical Specifications :

Material	: Aluminum
Diameter Range	: Ø 52 mm – Ø 1000 mm
Temperature Range	: -30 °C / + 150 °C
Air Velocity	: Max. 30 m/sec.
Operating Pressure	: Max. 5000 Pa.
Class	: Flame retardant M1
Standard offer type	: Package / 10 m.

Insulated Sky

Insulation	: 25 mm – 100 mm thickness and 12–16 kg / m ³ density glasswool
Jacket	: Aluminum

SONO SKY

Made of micro perforated laminated aluminum foil which provides sound insulation and high tensile steel wire for heating ventilation and gas transition systems.

Technical Specifications :

Insulation	: 25 mm – 100 mm thickness and 12–16 kg / m ³ density glasswool
Jacket	: Aluminum
Barrier	: PET